


HEAT ALARM BATTERY POWERED



Wireless
Radio Frequency (RF)
Interconnection



48 Hour
Memory Function

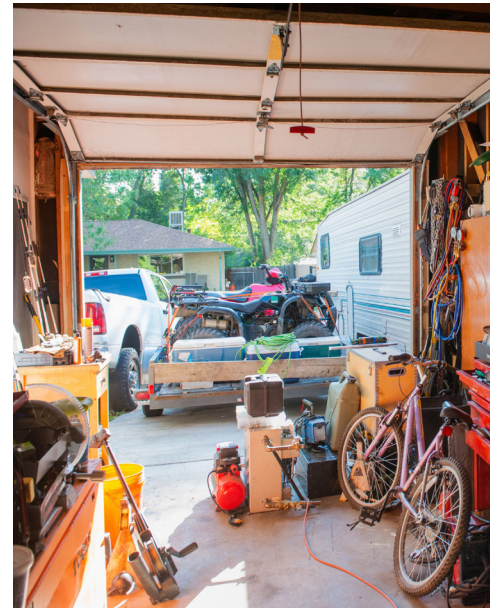

HEAT ALARM WITH BUILT-IN RF MODULE

Emerald's Heat Alarm features a built-in RF module for easy integration with other Emerald RF alarms in the home, enhancing overall safety. With a 48-hour memory function, it simplifies the identification of faulty alarms, increasing protection against hazards.

This alarm is not suitable as a fire safety device unless interconnected to one or more smoke alarms.

The battery in this unit is intended to last it's 10 year service life and cannot be replaced.

INCREASE YOUR PROTECTION

Receive alerts from your Emerald radio frequency (RF) smoke alarm network anytime, anywhere with SafeLink via your phone and the Emerald app.

FEATURES

- Built-in RF module
- 48 hour memory function
- 54°C - 65°C sensitivity
- Fault and low battery warning
- Easy install - twist on base
- Hush function
- 10 year battery
- Complies with AS 1603.3:2018



SPECIFICATIONS

| | |
|-------------------|---------------------|
| MODEL NUMBER | EP-HA-RF-10 |
| DIMENSIONS | Φ120 x 46.5mm |
| WEIGHT | 128.7g |
| WARRANTY | 10 Years |
| WIRELESS DISTANCE | >20m (100m outside) |

| | |
|--|---|
| POWER - BATTERY | 10 year non-replaceable 3V lithium battery (CR17450) |
| MOUNTING OPTIONS | Ceiling mount only |
| INTERCONNECT | Built-in wireless radio frequency (RF) technology Connects with up to 40 Emerald RF enabled alarms |
| SENSOR | Thermistor technology |
| SOUND PATTERN | ISO 8201 |
| ALARM VOLUME | >85dB(A) @ 3m |
| NORMAL OPERATING & STORAGE TEMPERATURE | 0°C to 40°C |
| NORMAL OPERATING & STORAGE HUMIDITY | <93% relative humidity (non-condensing) |

COMPATIBILITY
RF heat alarm is compatible with -

- Emerald's radio frequency (RF) enabled alarms
- Emerald SafeLink Wi-Fi gateway
- Smoke Alarm Controller

